






BMYA (Movable stopper)
(Aluminium Type)

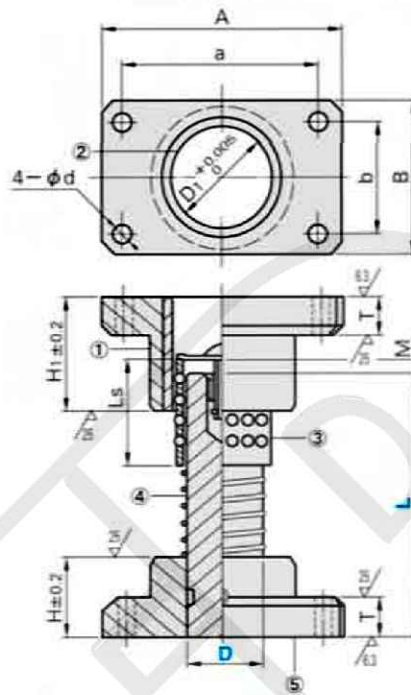


BMYAP (Movable stopper)
(With dowel holes Aluminium Type)

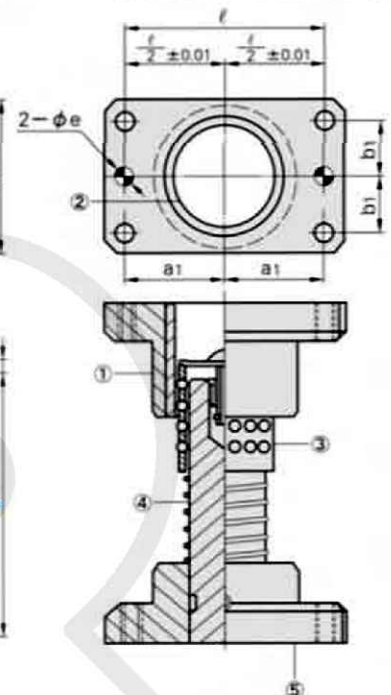

BMYJ (Movable stopper)
(Plastic Type)

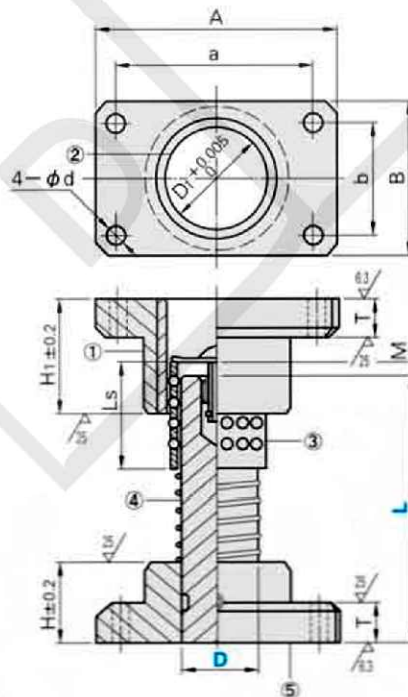

BMYJP (Movable stopper)
(With dowel holes Plastic Type)

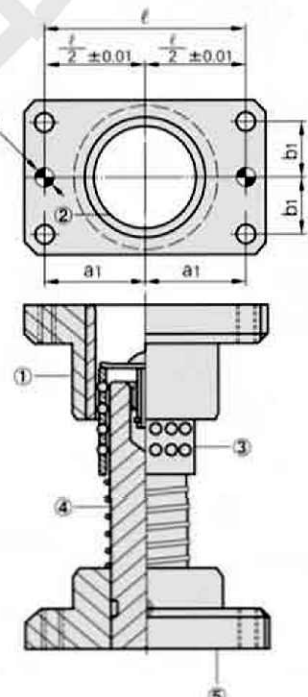

Perpendicularity between the die Holder's bottom and the guide post : less than 0.02 against 100

Holder Guide Post Series



D	D1	A	B	a	b	d	H	H1	T	Ls	M	ℓ	a1	b1	eh7		⑥ Attached bolt	⑦ Attached dowel pin
20	26	74	44	56	30	6.6	30	50	15	50	0~20	56	28	15	6	+0.012 0	CB6-30	GMST6-20
25	31	84	48	66	30	9	30	50	20	50	0~20	66	33	15	8	+0.015 0	CB8-35	GMST8-30
32	40	100	58	76	36	11	40	60	20	60	0~25	76	38	18	8		CB10-40	GMST8-30
38	48	130	75	100	44	11	50	70	25	70	0~29	100	50	22	10		CB10-45	GMST10-40
50	60	155	90	125	60	14	65	90	25	90	0~42	125	62.5	30	10		CB12-50	GMST10-40

Catalog NO		L
Type	D	
BMYA	20	90 100 110 120
		130 140 150 160
	25	90 100 110 120
		130 140 150 160
BMYAP	32	170 180 200
		110 120 130 140 150
	38	160 170 180 200
		220 240 260
BMYJP	50	130 140 150 160
		170 180 200 220
	50	240 260 300
		170 180 200
BMYJ	32	220 240 260
		160 170 180 200
	38	130 140 150 160
		170 180 200 220
BMYJP	50	240 260 300
		170 180 200
	50	220 240 260
		300 350

BRAHMADEVI ENGINEERING PRODUCTS

Regd. Office : 19, Martand Chowk, INDORE - 452 007 (M.P.) INDIA

Ph. : +91 - 731 - 2720243, Fax : +91 - 731 - 2721554

E-mail : ishan1809@yahoo.com, ruchir@diespares.com Website : diespares.com