


## Z163


### Early ejector return assembly

It is used for return device of thimble board. Besides, it can also be used for second ejection. The installation shall be accurate. Otherwise, the product is likely to be damaged.

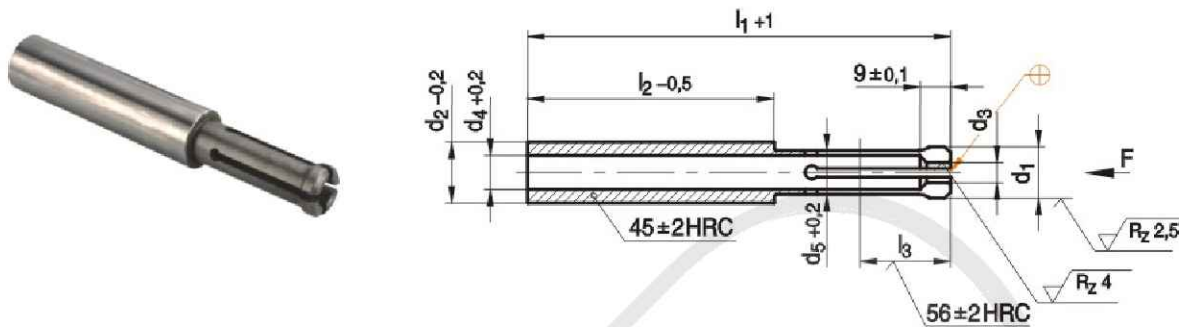

Type	max.F [ N ]	l <sub>3</sub>	l <sub>2</sub>	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	l <sub>1</sub>
Z163/6 × 125	12000	20	73	16	18	10	13	6	125
10 × 160	20000	25	100	20	24	12,5	17	10	160

## Z164

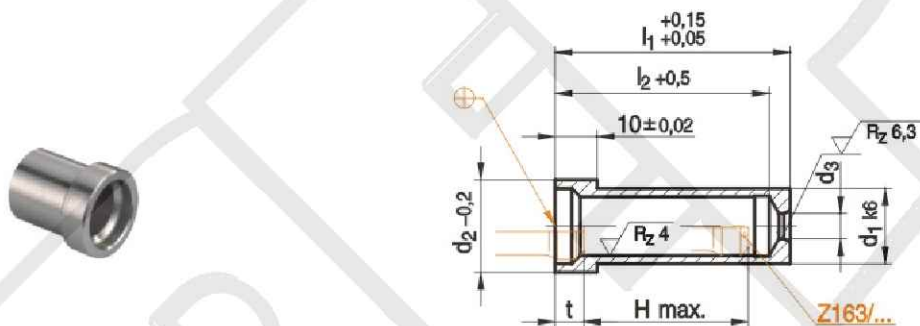

Type	max.H	t	l <sub>2</sub>	d <sub>2</sub>	d <sub>1</sub>	d <sub>3</sub>	l <sub>1</sub>
Z164/6 × 36	24	6,7	31	22	18	6	36
46	34		41				46
56	44		51				56
Z164/10 × 36	23	6,7	30	29	24	10	36
46	33		40				46
56	43		50				56
76	63		70				76

