





Characteristics: It has reset mechanism and double ejection device function. Good lubrication is needed in usage so that product life can be much longer and the product can become more abrasion resistant.

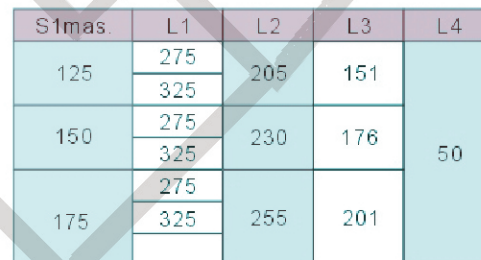


| Pos. | S | D | |
|------|----|----|--|
| 12 | 5 | 42 | |
| | 10 | | |

Installation diagram

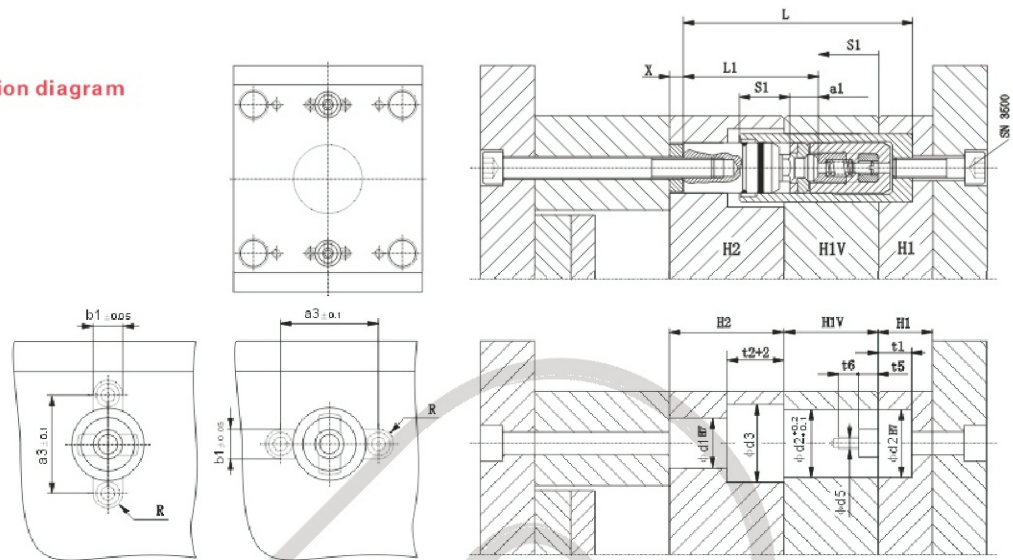

| Type | a1 | a2 | a3 | b1 | d1 | d2 | d3 | d4 | d5 | t | t5 | t6 | M | R |
|-------------|-------|----|----|------|----|----|----|----|----|-----|----|----|----|---|
| Z3-1/Z 3-11 | 10,8 | - | 35 | 10,1 | 17 | 25 | 27 | - | M4 | 4,5 | 8 | 8 | 8 | 5 |
| Z3-2/Z 3-21 | 14,25 | 18 | 46 | 14,1 | 25 | 34 | 36 | 39 | M6 | 4,5 | 10 | 10 | 10 | 7 |
| Z3-3/Z 3-31 | 18,4 | 27 | 57 | 18,1 | 30 | 42 | 44 | 47 | M8 | 6 | 12 | 12 | 12 | 9 |

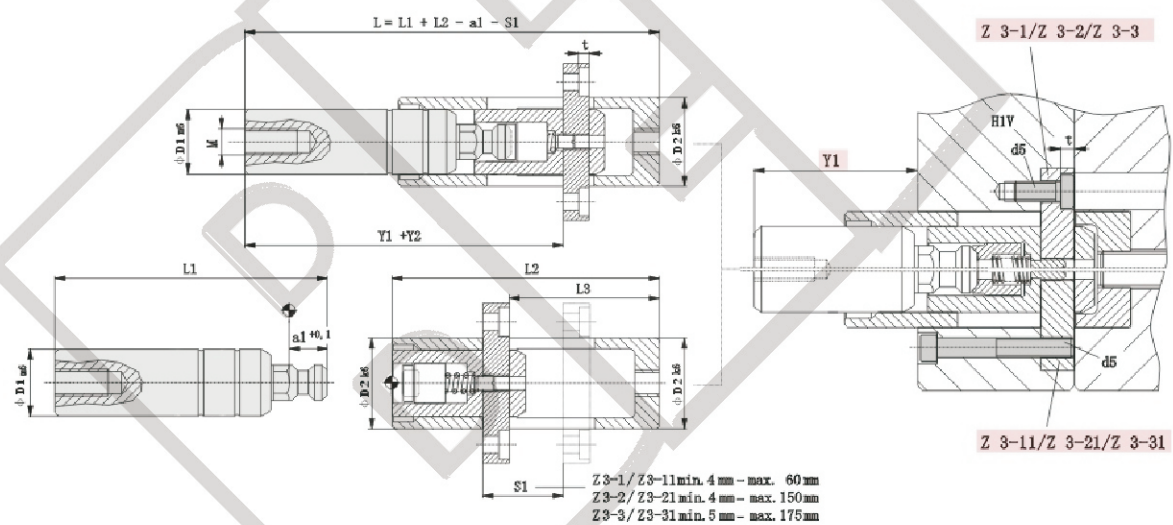

Example

