


Slide Retainer Series

Z374 BALL PLUNGER

- It is used for light load of stainless steel.
- Applicable temperature: $-30^{\circ}\text{C} \sim 250^{\circ}\text{C}$
- Characteristics: It does not need threaded hole processing which reduces processing time.



Type	max. °C	d3	l3	d2	Sn	F1 [N]	F2 [N]	l2	d1	l1
Z 374/ 4x5	250	4.6	1	3	0.7	2	4	5.9	4	5
5x6		5.6		4	0.8	4	5.6	7	5	6
6x7		6.5		5	1.2	6	9.6	8.5	6	7
8x9		8.5		6.5	1.4			10.8	8	9



Order: Type No. x Pcs
Z374/4x5 x 10



BPJ/BSJ/BSX BALL PLUNGER

Material : JIS S45C

There is cross-type and inner hexagonal for selection.



N X 0.101972

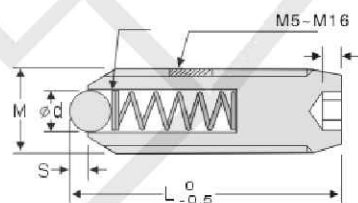

Type	Size						(N)		(N)		(N)	
	M	d	S	L	I	B	min	max	min	max	min	max
BPJ BSJ BSX	2	1.0	0.3	5	1.0	0.9	1.0	2.04	--	--	--	--
	3	1.5	0.5	7	1.0	1.5	1.0	2.0	1.5	2.9	2.2	5.0
	4	2.5	0.8	9	1.5	2	2.0	4.9	3.9	9.8	2.5	12.5
	5	3.0		12	2.0	2.5	2.9	9.8	4.9	19.6	11.2	24.1
	6	3.0	1.0	13	2.5	3	4.9	14.7	9.8	29.4	17.7	33.4
	8	4.0		15	2.5	4	6.9	19.6	12.7	39.2	21.4	45.3
	10	5.0	1.2	16	3.0	5	8.8	24.5	18.6	49.0	23.5	60.0
	12	7.0	1.8	20	3.0	6	9.8	29.4	19.6	58.8	24.1	63.7
	16	9.5	2.5	25	3.0	8	15.7	49.0	29.4	98.0	43.6	116.3



Order: Type No. x M x Pcs
BPJ x 2 x 10

BRAHMADEVI ENGINEERING PRODUCTS

Regd. Office :19, Martand Chowk, INDORE - 452 007 (M.P.) INDIA
Ph. : +91 - 731 - 2720243, Fax : +91 - 731 - 2721554
E-mail : ishan1809@yahoo.com, ruchir@dieaspares.com Website : www.dieaspares.com